
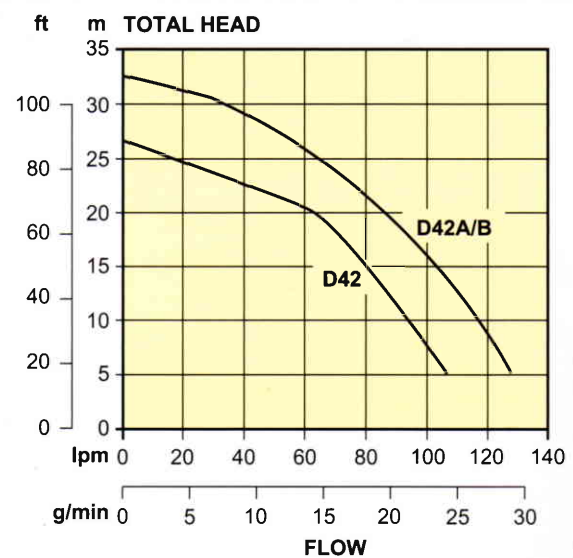


	Double Cased Models DC10	Double Cased Models DC30	Twin Impeller Models D42	Dewatering Models D10	Dewatering Models & larger	Dewatering Models D15	Vortex Models (V)	Single Channel Impeller Models (S)	Cutter Models (K)	Grinder Models (G)
Removal of clean nuisance water	✓	✓	✓	✓	✓	✓	✓	-	-	-
Light duty fountains	✓	✓	✓	✓	✓	✓	✓	-	-	-
Continuous fountain usage	X	✓	✓	X	✓	✓	✓	✓	-	-
Grey Water with nil or few small soft solids e.g. septic tank pumpouts	X	✓	✓	X	✓	✓	✓	✓	✓	✓
Dirty Water with less than 1% small hard solids – some wear should be expected	X	✓	✓	X	✓	✓	✓	✓	X	X
Water with up to 10% soft solids in suspension – sized 80% of discharge	X	X	X	X	X	X	✓	✓	✓	✓
Water with medium volumes of hair in suspension	X	X	X	X	X	X	✓	X	✓	X
Water with stringy materials in suspension	X	X	X	X	X	X	X	X	✓	✓
Semi-screened sewage	X	X	X	X	X	X	✓	✓	✓	✓
Raw sewage including sanitary products	X	X	X	X	X	X	X	X	X	✓
	✓ Suitable Selection					X Not Recommended				
Models available - kW Rating										
Automatic Single Phase 220/240 V	0.1	0.4	0.6	0.1	0.15 to 0.75	0.15 to 0.75	0.75	0.75	-	-
Manual* Single Phase 220/240 V	0.1	0.4	0.6	0.1	0.15 to 0.75	-	-	-	-	1.2 to 1.5
Manual* Three Phase 415 V	-	-	-	-	0.75 to 3.7	0.75	0.75 to 3.7	0.75 to 3.7	0.75 to 3.7	1.2 to 1.5



DEWATERING

DEWATERING

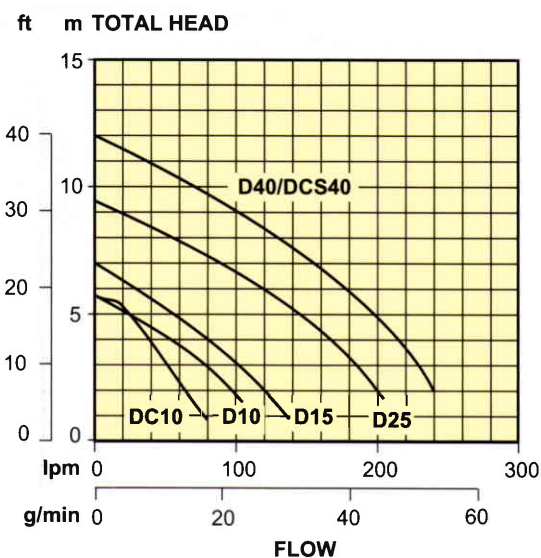

VORTEX

DEWATERING

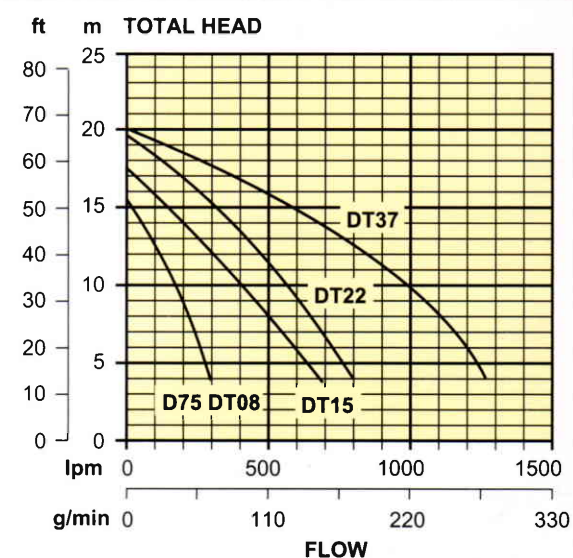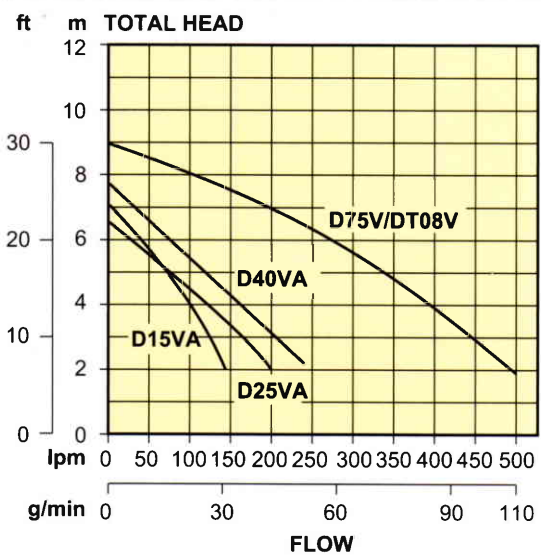

GRINDER

SEWAGE

